


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 9 TOWNSHIP 15 RANGE 5  
DATE: 7-12-07  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 4-2-04

IN. S.P.C. E ZONE NAD '83  
NAME: 15050901  
N: 502011.5442(m)  
E: 72274.4941(m)

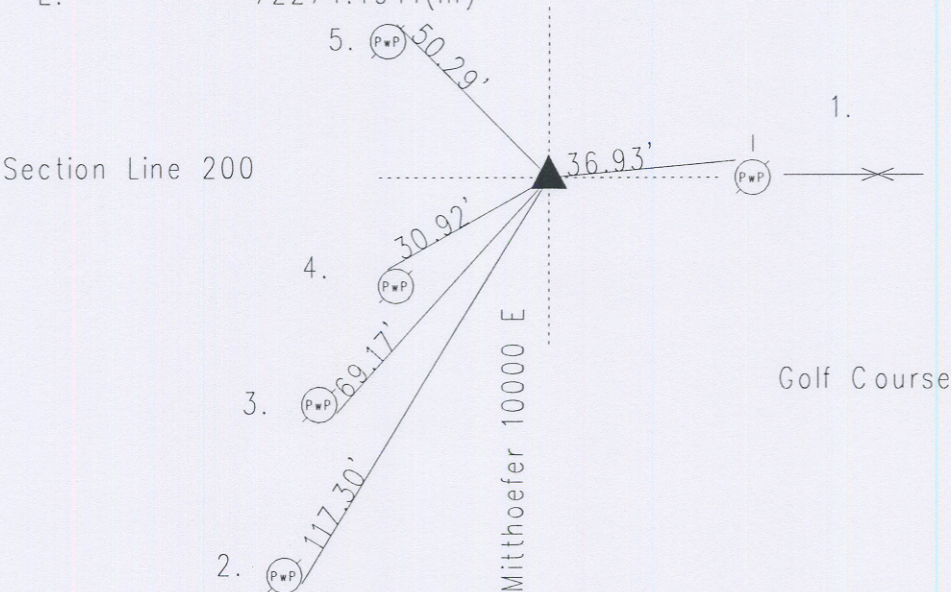

Original post set 1820 by John Hendricks with Witness: 20" beech S 46 W 3 links; 14" dogwood N 40 E 3 links per Marion County Atlas pg. 14. Survey by Voorhis 8-28-1862 indicates no stone but witness: 18" oak S 12 W 69 links per Warren Township legal Survey Book pg.49. Monroe 7-1956 called a railroad spike over stone. Burres 8-14-63 called same. McLand 5-28-69 called stone. SeFranka 2-27-74 called stone 15" down. Howe 12-17-74 called railroad spike over stone found 15" down. Dug by Schneider 12-12-83 and a PK nail fd at surface. PK nail was 0.68' N of high point of stone fd 18" down. Railroad spike set w/cut x at surface. Gries 8-20-87 called railroad spike. Wilcoxon 6-30-93 called RR spike over stone 18" dn. Excavated 3-28-98 by Wilcoxon PK at surface. Stone 18" dn. Harrison set. Re-tied 3-28-98; 4-2-04 & 7-12-07.

REF.	DISTANCE	DESCRIPTION
1.	36.93'	Mag nail w/bw NW PwP# & fence post 2" up
2.	117.30'	Mag nail w/bw F PwP#163-551B 18"up
3.	69.17'	Mag nail w/bw SF PwP#296-551B 24"up
4.	30.92'	PK nail NW PwP#112-551B 15"up
5.	50.29'	PK nail F PwP#75-551 B 3"up